



Swagtron T3 Wheel Replacement

If one of your Swagtron's wheels are damaged, this guide will help you replace it.

Written By: Klara Perkins



INTRODUCTION


Replace one of your Swagtron's wheels with this guide. To avoid electric shock, discharge the capacitors using the capacitor discharge tool before making any changes to your Swagtron.




TOOLS:

- [Capacitor Discharge Tool](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — Cover

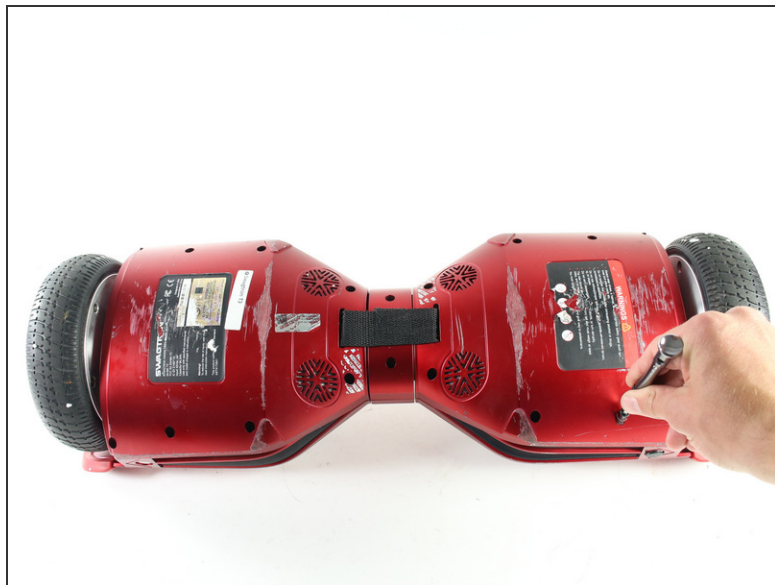




 Make sure the hoverboard is completely powered off and unplugged from any outlets.

- Flip the Swagtron so that the footpads are facing the ground.
- Unscrew the sixteen 9.4 mm Phillips #1 machine screws on the side of the Swagtron that is now facing upwards.

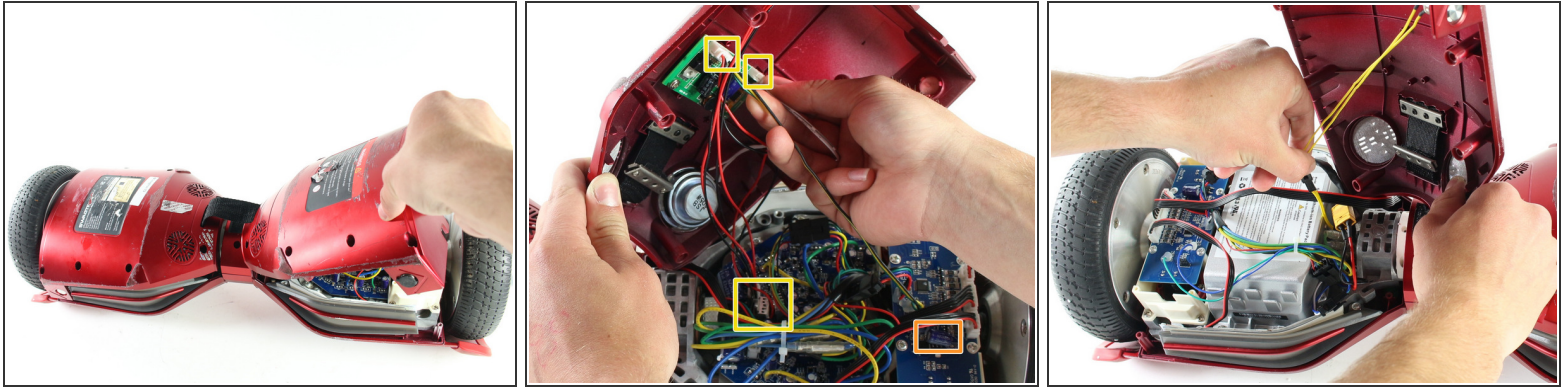
Step 2



 Be careful with the small blue capacitors indicated by the orange box. There are many of these capacitors in the device.



- Slowly lift the backside cover.
-  Both sides lift up the same way, but the motherboard is under one side and the battery is under the other.
- Detach the four cables connected to the cover by pinching the connector clips and pulling the cables out:
 - Three cables on the motherboard side.
 - Two red cables with white connectors and one white cable with a white connector.
 - One yellow cable with a black connector on the battery side.
-  After detachment, you should be able to completely remove the backside cover.

Step 3 — Wheel

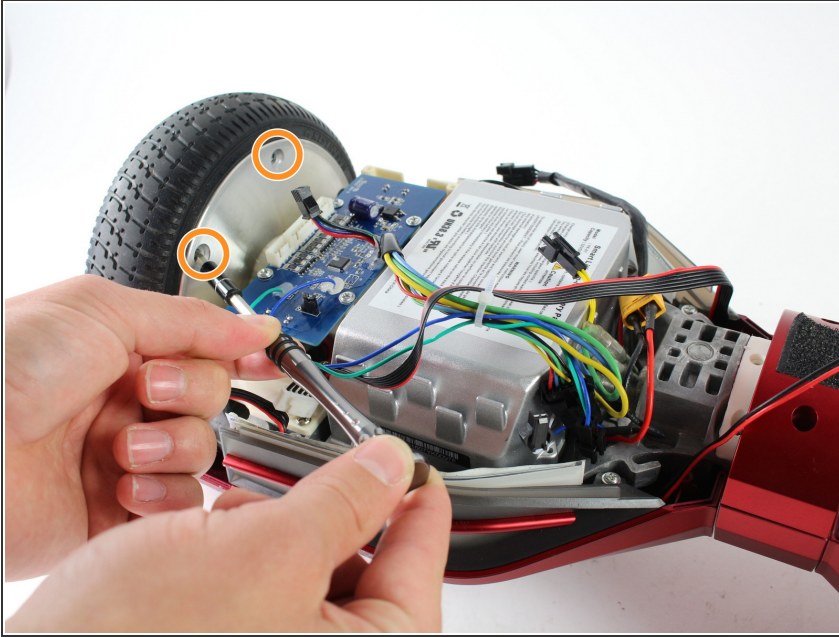

- Unscrew the six 11.2 mm Phillips machine screws from the inside of the wheel.
- ⓘ You may need to spray a thin lubricant, such as PB Blaster, directly onto each of the six screw points to loosen them.

Step 4

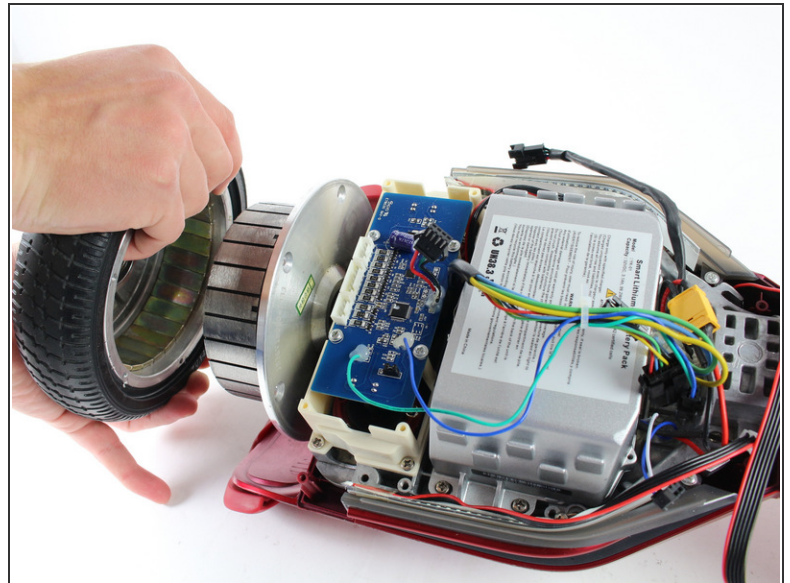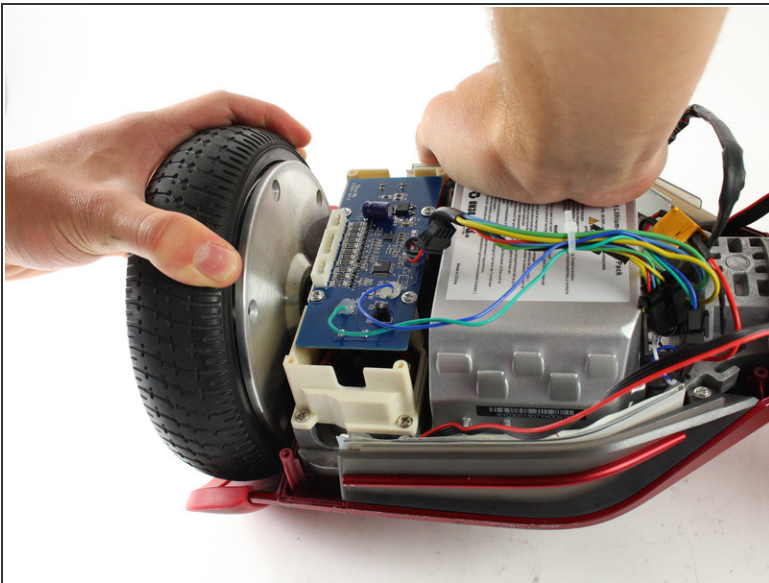

- Pull the wheel off of its base.

- ⓘ The wheel has a strong magnetic connection to the base, so separating them will require a lot of force.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 10:53:39 AM.